

AHR-610B

16CH 1080P/720P/960H AHD DVR



FEATURES:

- AHD 1080P/720P/960H record.
- Support IP Cam record.
- H.264 high profile compression algorithm, low bit rate, high picture quality.
- Dual stream - individual network video streaming and DVR record streaming.
- Phone remote view (iPhone / iPad / Android).
- HDD data retention days / Daylight saving time / NTP.
- Device ID setup for control keyboard.
- USB or remote firmware upgrade supported.
- Smart channel settings: Live / playback screen digital zoom, playback camera title and date / time position movable.
- Operation log list / Network online users list check.
- Intensive security function by chosen AUTHORITY.
- Convenient backup by AVI file.
- DVR control: mouse, control keyboard, network.
- Safari browser operation on MAC.


SPECIFICATIONS:

Model		HS-AHR610B	
Input	AHD	16CH	
	IP	8CH	
Simultaneously Local Playback		16CH AHD or 1CH IP	
Output	VGA	1 (Max : 1920 x 1080)	
	HDMI	1 (1920 x 1080)	
	CVBS	1 (Simultaneously or SPOT)	
Color		6.7 million	
Display Channel		1 / 4 / 9 / 16	
Sequence Display		Available	
Display Resolution		1920(H) x 1080(V)	
Recording Resolution	AHD	1080P	1920 x 1080@192fps
		720P/1080Lite	1280 x 720@400fps
		960H	960 x 480@400fps
	IP	3MP	2048 x 1536@30fps (each)
		1080P	1920 x 1080@30fps (each)
		720P	1280 x 720@30fps (each)

AHR-610B

16CH 1080P/720P/960H AHD DVR

Dimension:

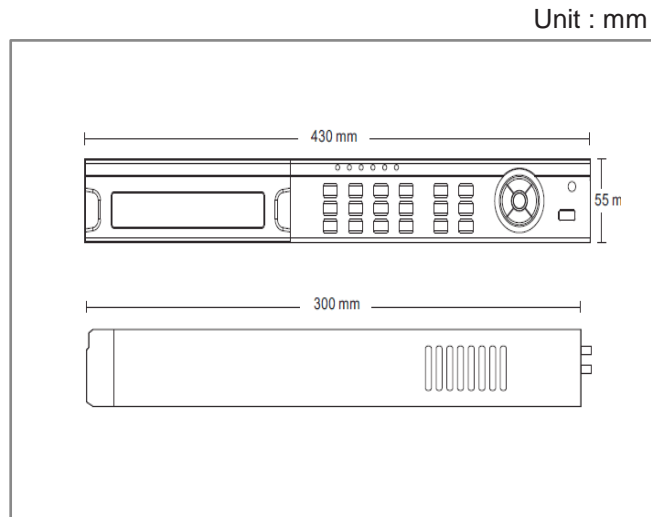

SPECIFICATIONS:

Model	HS-AHR610B
Record Quality	Highest / Higher / Medium / Lower / Lowest
Compression Method	H.264 High Profile
Recording Mode	Auto / manual / schedule / motion / alarm
Multi-task	Live / Record / Play / Network / Backup
Motion Detect	22 x15 grids camera for all channel
Backup	USB 2.0 / Network remote backup
Storage	SATA x 2 (each 8TB)
Audio Input	RCA x 4
Audio Output	RCA x 1
Alarm Input	4
Alarm Output	1
HDD Record Mode	Full stop / overwrite
PTZ Control	PELCO-P, PELCO-D, CoC(UTP)
Mobile Surveillance	iPhone / iPad / Android
Ethernet	10/100 M Base-T
Network-Function	Support licensed CMS(100CH) / EMAP/ IE
Network Connection	TCP/IP, PPPoE, DHCP, DDNS(Auto DDNS)
Client Application	Display / Playback / Backup / DVR control / PTZ Control
Power Source	DC12V
Operating Temperature	5°C~40°C (41°F~104°F)
Operating Humidity	Less than 90%
Dimension	430(W) x 55(H) x 300(D)mm