

# Full HD Resolution Mini Fixed DOME CAMERA

The Perfect Addition to Any CCTV System

NDT-7202/7212 Mini Fixed DOME CAMERA



- » The network cameras offer advanced IP features and performance with Full-HD resolution real-time H.264 .




## » Key Features

- 1920 x 1080p Resolution Supported
- 2DNR(2 Dimensional Noise Reduction)
- ONVIF Supported
- BLC(Back Light Compensation)
- Micro SD Supported
- Multiple Compression (H.264, MPEG4, MJPEG )
- Triple Streaming
- Cross Web-Browsing
- Motion Adaptive Transmission
- Dynamic Adjustable Bit Rate
- Event Buffering
- FTP Image Upload
- Web Casting
- Password Protection, IP Filtering
- DDNS Supported
- Auto exposure (AE)
- Auto White Balance (AWB)
- Privacy Masking

## » Dimensions

Unit: mm

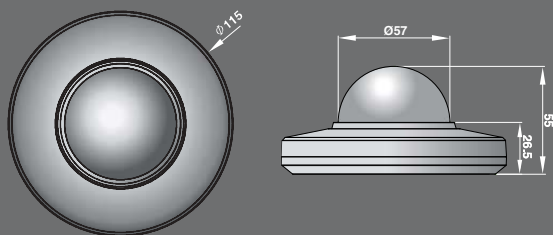

## » Technical Specification

Model	NDT-7202	NDT-7212
<b>IMAGE</b>		
Image Sensor	1/2.8" SONY Exmor CMOS	
Lens	Megapixel 3.7mm FIX	
Scanning Mode	Progressive Scan	
Min. Illumination	Color: 0.2Lux(F1.8, 50IRE)	
AE/AWB	Yes	
DNR	2DNR	
D&N	digital D&N	
WDR	No	
DIS	No	
BLC	Yes	
Built-in IR	No	
Remote-Focus	No	
<b>VIDEO</b>		
Video Out	Yes (Phone Jack Style)	
Progressive Encoding	Yes	
Compression	H.264(BP/MP/HP), MPEG4(SP), MJPEG	
Resolution Supported	Full-HD, SXGA, HD, D1, VGA, CIF, QVGA	
Frame Rate	Full HD, 30fps @ All Resolution	
Multiple Streaming	Triple Streaming	
<b>IN/OUT</b>		
Audio In/Out	No	
Alarm In/Out	1/1	
RS485	No	
Ethernet	10/100Mbps	
Local Storage	Micro SD	
<b>FEATURE</b>		
Motion Detection	Yes, max. 8 programmable zone	
Event Buffering (Pre & Post)	Yes	
Privacy Masking	Yes (8 windows)	
PrVA(Pre-recorded Voice Alert)	No	
Video Analytics	No	
Cross Web Browser	Safari, Firefox, Google Chrome	
FTP Image Upload	Yes	
ONVIF Certificate	Yes	
<b>SYSTEM</b>		
Network Time Sync	Yes	
Zero Configuration	Yes	
Security	Password Protection, IP Filtering, HTTPS, SSL	
<b>NETWORK</b>		
Max. Connections	10	
Protocols	"IPv4/IPv6, Manual, TCP/IP,UDP,HTTP,RTSP, NTP,DHCP,SMTP,DDNS,HTTPS,RTCP,Bonjour"	
NAS Support	Yes	
JPEG push	Yes	
DDNS	Yes (DDNS)	
Remote Client	Web, NC-Titanium, SmartManager	
<b>MISCELLANEOUS</b>		
Weatherproof	No	
PoE	802.3af Class 0	
Wi-Fi	EEE802.11(b/g/n)	No
Power	PoE, DC12V	
Power Consumption	DC 12V, 375mA, 4.5W / PoE 802.3af Class 0	
Operating Temperature	-10° C~ + 40° C	
Humidity	0~80% (non-condensing)	
External Dimension	55(H)mm x 115(Ø)mm	