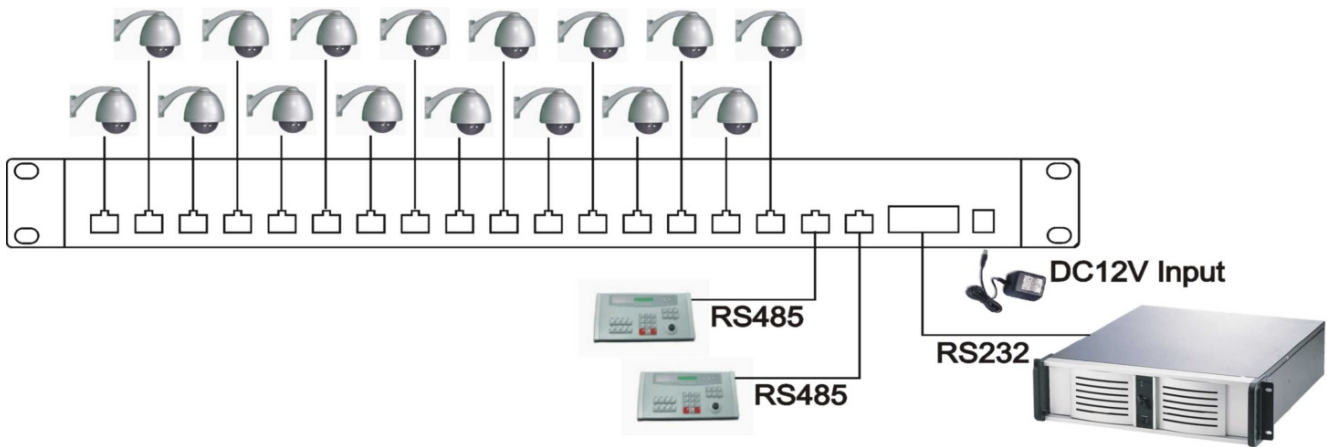## RS004, RS008, RS016 − RS485 Distributor



# FEATURES:

**RS004, RS008, RS016 are serial data distributor and similar to a repeaters, gives serial data back on 4/8/16 outputs at the same time, allowing perfect configurations. The transmission in RS485 and takes places at the same time on all 4/8/16 outputs. The receiving mode of the input can be selected in RS485 or RS232.**

.

# SPECIFICATIONS:

**RS004   RS485 Distributor 1 Input 4 Output**
Input option: 1 x RS232, 2 x RS485 (3 input can be "stand by" status at the same time, but only one controller will be activated at once)
Output: 4xRS485, each channel connection range up to 1200 meters by twisted pair cable.
Built in surge protection at each channel.
Each input/output is isolated.
Ability to cascade connection to other units RS004/RS008/RS016.
The application gives serial data back on 4 outputs at the same time, to provide perfect configurations.
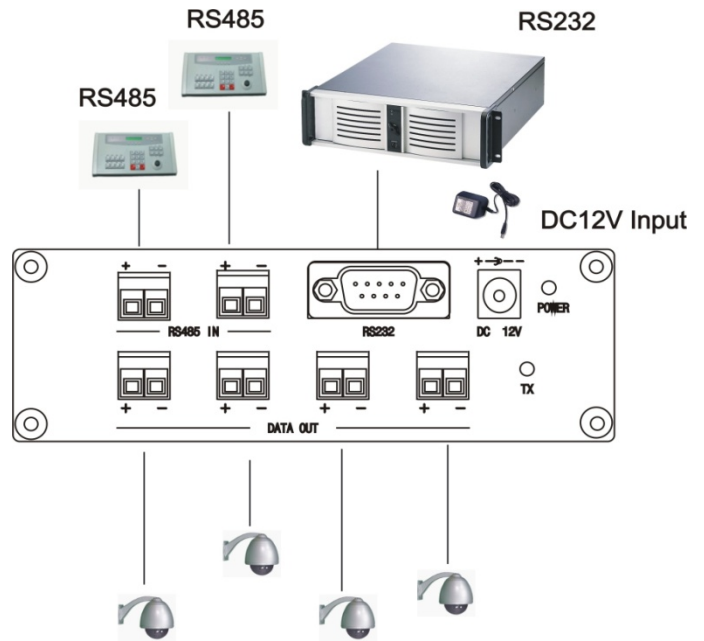Power supply included.

**RS008   RS485 Distributor 1 Input 8 Output In 1U Rack Mounting Panel**
Identical to RS004, but 1 input 8 output.

**RS016   RS485 Distributor 1 Input 16 Output In 1U Rack Mounting Panel**
Identical to RS004, but 1 input 16 output.

## ịnteractif Video Systems

# Specifications:



| ITEM NO. | RS004 | RS008 | RS016 |
|---|---|---|---|
| DATA Input | RS232 / RS485 (Terminal Block) | | |
| | 4 Port (Terminal Block) | 8 Port (Terminal Block) | 16 Port (Terminal Block) |
| Data Output Signal | RS485 | | |
| Power Supply | 12 VDC | | |
| Power Consumption | 350mA | | |
| Operating Temperature | 0 〜45°C | | |
| Dimension　W x H x D mm | 133X76X44 | 482x100X44 (1U) | 482x100X44 (1U) |
| Weight　　　g | 425 | 1050 | 1100 |
| Material | Metal Black | | |

**Interactif Video Systems**