


S1 SERIES

Corrosion Proof Washing System

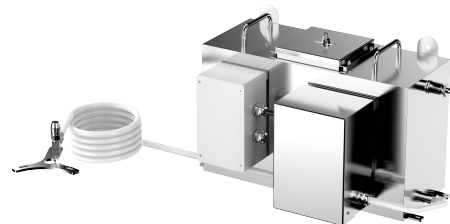

HAS1WSTCA20




OPERATIONAL	
Ingress Protection Level	IP66
Explosion-proof solenoid valve Ex marking	N/A
Material	Stainless steel 304
Water tank	20L
Water spray form	Atomizing
Clean agent	Windshield washer fluid
Water pump lift:	10m
Voltage	DC24V(standard)/AC100-240V/AC24V
Max current	1.1A (24VDC type)
Max flow	0.26 G/M (1.0L/min)
Max pressure	125PSI (0.86MPa)
Mounted way	On the ground
Control way	RS485, by preset
Protocol	Pelco-D
Baud rate	9600
Dimension	562*333*340mm (LxWxH)
Net Weight	13kg
Warranty	2 years

S1 SERIES Corrosion Proof Washing System


Nozzle for PTZ camera





Dimension:

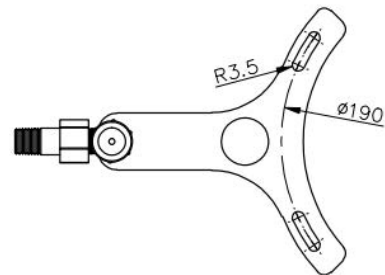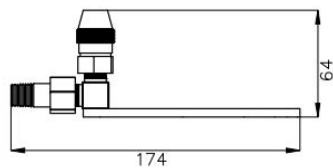

Nozzle for Bullet camera

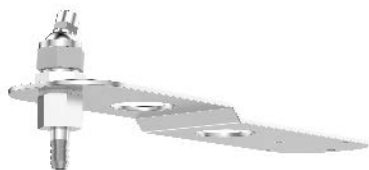


Dimension:

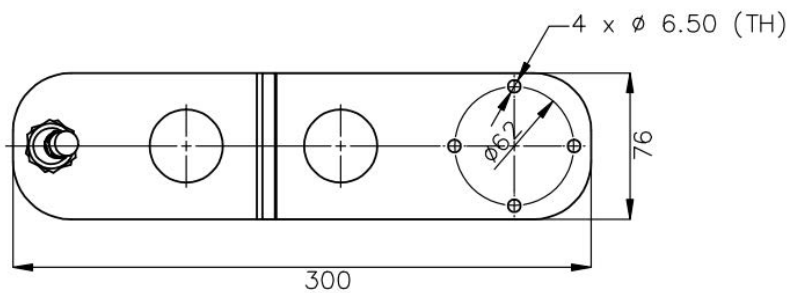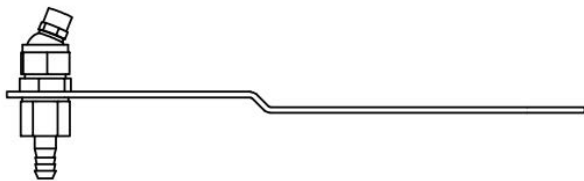

S1 SERIES Corrosion Proof Washing System

DIMENSION

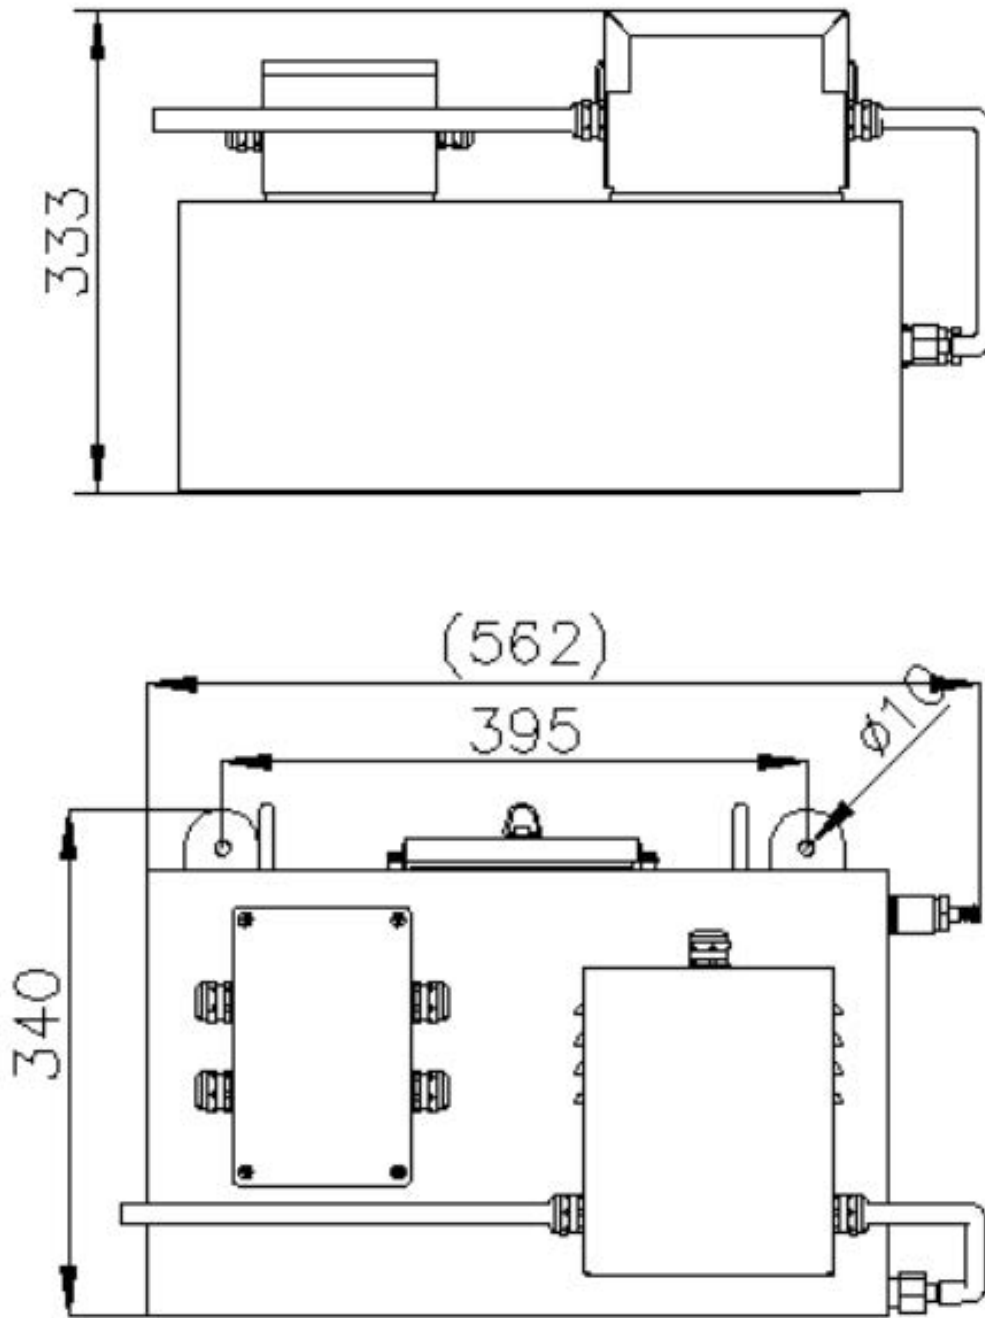

For more information

buildings.honeywell.com/security

Honeywell Commercial Security

Emaar Business Park, Sheikh
Zayed Road, Building No. 2,
2nd floor, 201

Post Office Box 232362

Dubai, United Arab Emirates

Tel: +971 4 450 5800

www.honeywell.com

© 2022 Honeywell International Inc.

Honeywell